


Valvola di blocco e controllo portata per bracci, montaggio in linea, versione sinistra

Flow check and metering valve for booms, line mounted, left version

Rev.03-2010/08

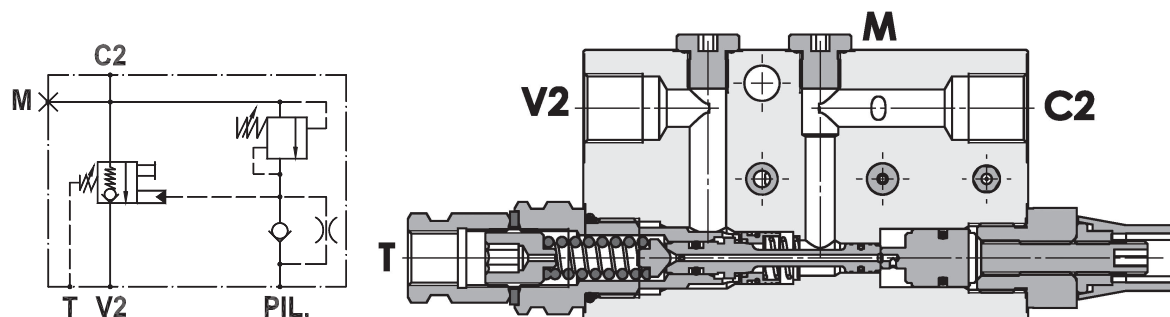

SPECIFICHE TECNICHE

Materiali: corpo in acciaio zincato. I componenti interni sono in acciaio trattato termicamente.

Portata max.: 35 l/min

Pressione max.: 420 bar

Regolazione pressione: mediante vite

Campo di regolazione pressione: vedere pag.02

Peso: 1.950 Kg

TECHNICAL SPECIFICATIONS

Materials: body is in steel zinc plated. Internal parts are in hardened steel.

Rated flow: up to 35 l/min

Max. setting: 420 bar

Adjustment means: leakproof screw adjustment


Adjustable pressure range: see page 02

Weight: 1.950 Kg

DIAGRAMMA PERDITE DI CARICO - PRESSURE DROP CURVES

Viscosità olio 24 mm²/sec. (3,5 °E)
Temperatura 50 °C


Oil viscosity 24 mm²/sec. (3,5 °E)
Temperature 50 °C

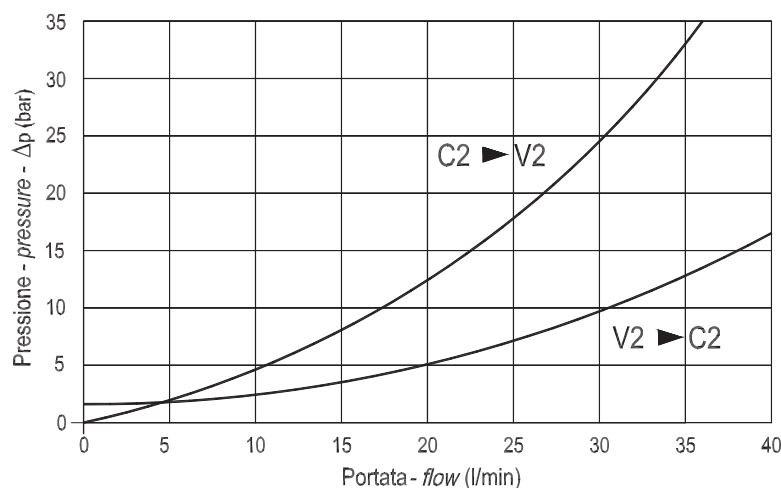

Valvola di blocco e controllo portata per bracci, montaggio in linea, versione sinistra

Flow check and metering valve for booms, line mounted, left version

Rev.03-2010/08

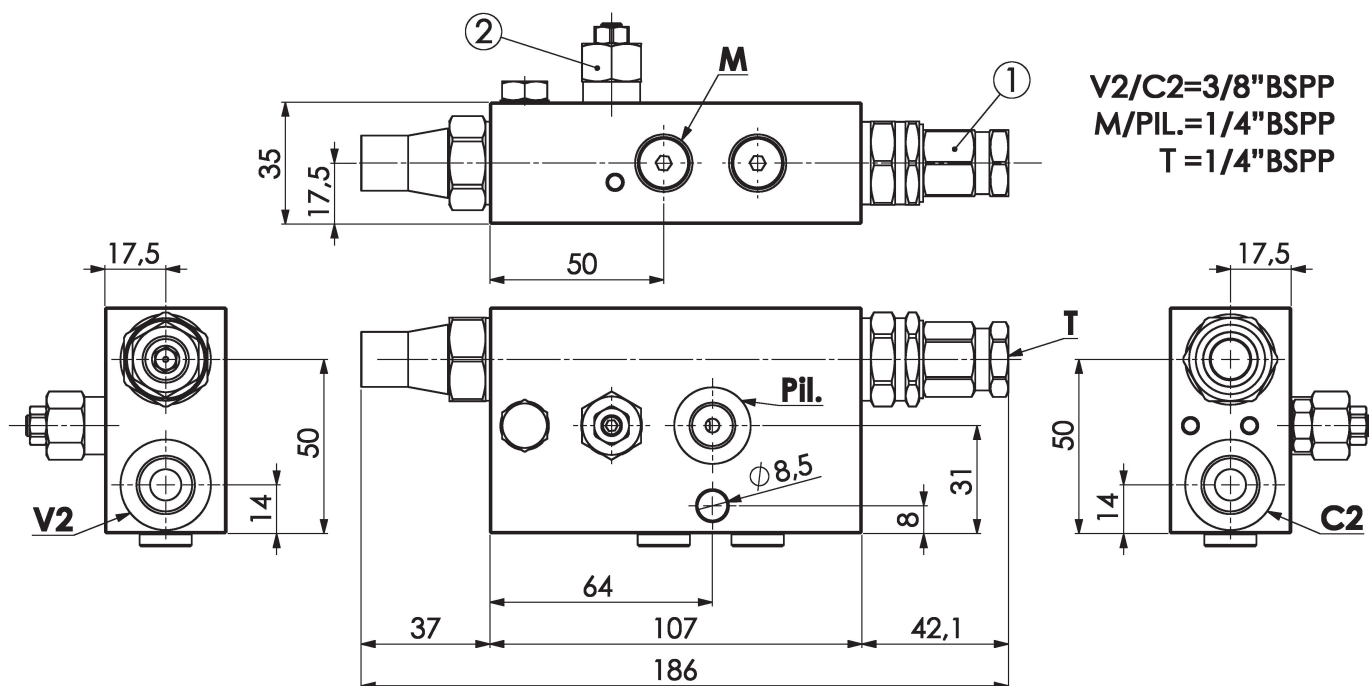

MOLLA VALVOLA (1) - SPRING VALVE (1)

Codice Code	Campo taratura min.-max. bar Adjustable pressure range bar	Increment. press. bar/giro vite Pressure increase bar/turn	Taratura standard bar Standard setting bar
05	4 – 15.5	4	7.5

MOLLA VALVOLA (2) - SPRING VALVE (2)

Codice Code	Campo taratura min.-max. bar Adjustable pressure range bar	Increment. press. bar/giro vite Pressure increase bar/turn	Taratura standard bar Standard setting bar
50	250 – 500	198	350

ESEMPIO DI ORDINAZIONE - ORDERING CODE EXAMPLE

F P E X C 3 5 S 3 / 8 L S X 0 5 5 0